


SECTION A-A



PCB LAYOUT

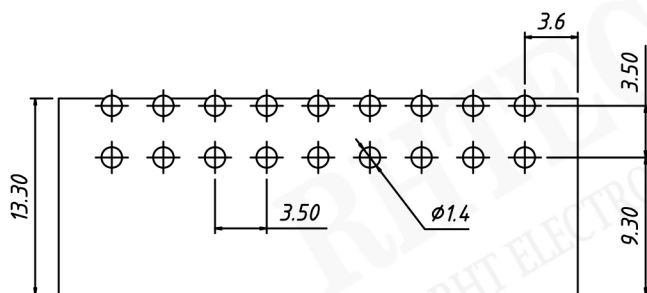

Material

Pin header: Brass , Tin plated

Housing: LCP , UL94V-0,Black

Electrical

Rated voltage: 300V

Rated current: 8A

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min

Mechanical

Temp. Range: -40 °C ~ +130 °C

Soldering: 285°C±5°C for 10S

Order Information

RE - C - THREDRN - 3.50 - XXP - S XX

RoHS

Terminal Block

Pitch

No.: of Pole

Product Code:00~99

Screw: S- Slot Screw

C- Cross Screw



NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm

SHEET SIZE:A4

SCALE: ---

> 0~3

> 3~18

> 18~50

> 50~120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

TERMINAL BLOCK