

Electrical :

Rated voltage: 300V

Rated current: 12A

Contact resistance: 20mΩ

Insulation resistance: 500MΩ/500V

Withstanding Voltage: AC2000V/1Min

Wire range: 22-14AWG 1.5mm²

Material

Housing: PA66,UL94V-0

Cage: Brass,Nickel Plated

Screws: M2.5 steel Zinc plated

Wire guard: phosphor bronze Nickel Plated

Mechanical

Temp. Range: -40° C ~ +105° C



MAX Soldering: +250° C for 5 Sec.

Torque: 0.4Nm (3.5lb.in)

Strip length: 6mm


Order Information

RE - C - 331K - 5.00 - XXP - 3 S

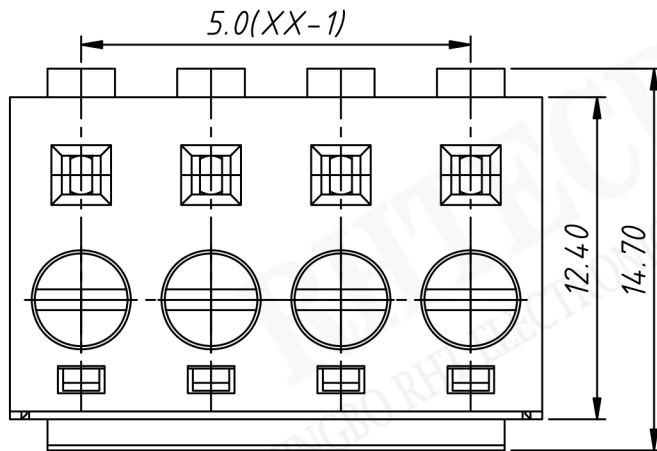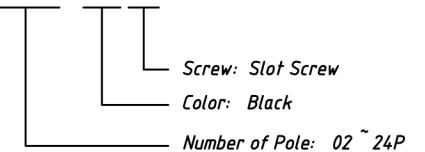

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0 ~ 3	± 0.12	> 3 ~ 18	± 0.15	> 18 ~ 50	± 0.3
> 3 ~ 18	± 0.15	> 18 ~ 50	± 0.3	> 50 ~ 120	± 0.5



TERMINAL BLOCK