

RE - C -104-5.00 PCB Terminal block 5.0mm Pitch

Electrical :

Rated voltage: 250V
 Rated current: 10A
 Insulation resistance: DC500V 500MΩ
 Withstanding Voltage: AC2000V/1Min
 Wire range: 22-14AWG

Material


Screws: M2.5 steel Zinc plated
 Contact: Brass, Electroless nickel
 Pin header: Brass, Tin-plated
 Shrapnel: Stainless Steel
 Housing: PA66, UL94V-0

Mechanical:

Temp. Range: -33°C~+105°C
 Torque: 3.5kgf.cm
 Strip length: 5mm

P.C.B.LAYOUT

P=5.00mm
 Length(L)=P*Pole

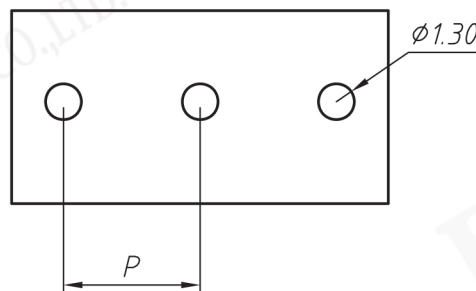

Product NO.: **RE - C -104-5.00-XXP X X X**

Pos. NO. _____ Customer Request
 Series No. _____ Screw: C=Cross Screw S=Slot Screw
 Pitch: 5.00=5.00mm Color: 1=White 2=Black 3=Blue
 Number of Pole: 2 4 6 8 9=Brown
 4=Green 5=Gray 6=Orange
 7=Yellow 8=Red 9=Brown

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120	> 0 ~ 3	> 3 ~ 18
± 0.12	± 0.15	± 0.3	± 0.5	± 0.12	± 0.15