
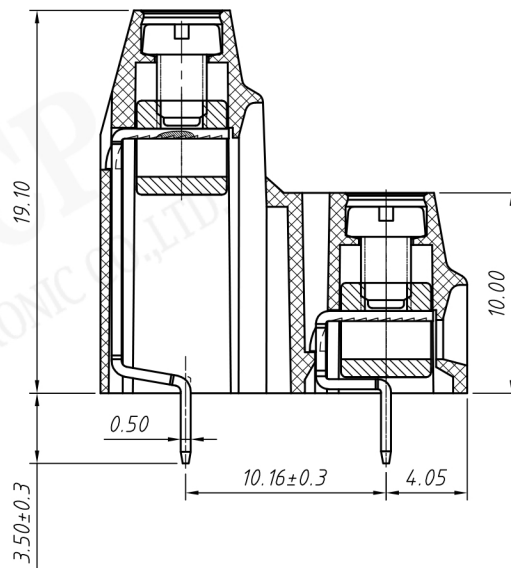


PCB LAYOUT

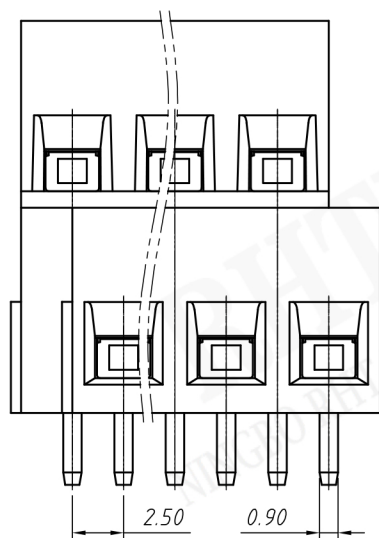

Material  
Housing: PA66, UL94V-0  
Clamp: Brass, Ni plated  
Pin Header: Brass, Tin plated  
Screw: M2.5, steel Zinc plated

Electrical  
Rated voltage: 300V  
Rated current: 15A  
Contact Resistance: 20 mΩ  
Insulation resistance: 500MΩ/DC500V  
Withstand voltage: AC2000V / 1 min  
Wire Range: 26~14AWG 1.5mm<sup>2</sup>

Mechanical  
Temp. Range: -40 °C ~ +105 °C  
Strip length: 6~7mm  
Torque: 0.4Nm (3.5Lb.in)

Order Information


RE - C - 127A -5.00-XXP-4 S 00

RoHS  
Terminal Block  
Pitch  
No.: of Pole  
Color: 4- Green  
Screw: S-Slot Screw  
Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0~3	> 3~18	> 18~50	> 50~120		
± 0.12	± 0.15	± 0.3	± 0.5		



TERMINAL BLOCK