


Material
Housing: PA66, UL94V-0
Screw: M2 Steel, Zn plated
Clamp: Brass, Ni plated
Cage: Brass, Ni plated
Fix screws: M2.5 Steel, Zn plated

Electrical
Rated voltage: 300V
Rated current: 8A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 28~16AWG 1.5mm²

Mechanical
Temp. Range: -40 °C ~ +105 °C
Strip length: 6~7mm
Torque: 0.2Nm(1.77Lbin)

Order Information

RE - C - EDGFM - 3.81 - XXP - 4 S 00

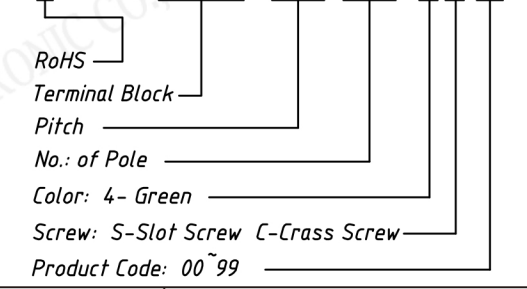

UNITS:mm	SHEET SIZE:A4			SCALE: ---
> 0~3	> 3~18	> 18~50	> 50~120	
± 0.12	± 0.15	± 0.3	± 0.5	

