


SECTION A-A

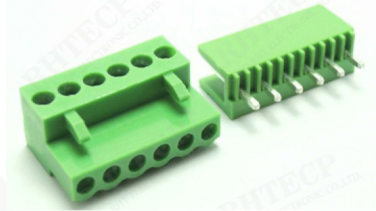

Material
Housing: PA66, UL 94V-0
Clamp: Bronze, Ni Plated
Screws: M2 Steel, Zn plated
Shrapnel: Brass, Ni plated

Electrical
Rated voltage: 300V
Rated current: 8A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min
Wire Range: 28~16AWG 1.0mm²

Mechanical
Temp. Range: -40 °C ~ +105 °C
Torque: 0.2Nm(1.7 bin)

Order Information

RE - C - EDK - 3.96 - XXP - 4 S 00

RoHS —
Terminal Block —
Pitch —
No. of Pole —
Color: 4 - Green —
Screw: S - Slot Screw C - Crass Screw —
Product Code: 00 ~ 99 —