
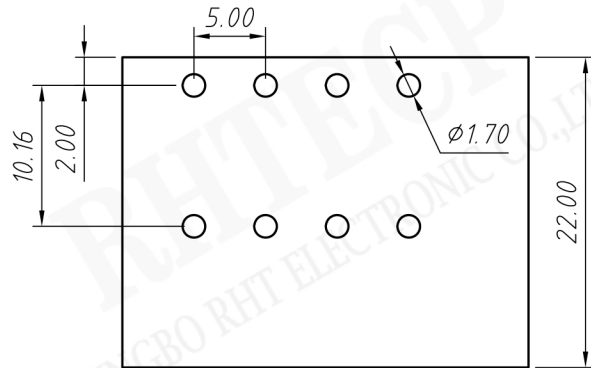


Material  
Housing: PA66, UL94V-0  
Pin header: Brass, Tin plated



Electrical  
Rated voltage: 300V  
Rated current: 15A  
Contact Resistance: 20 m Ω  
Insulation resistance: 500MΩ/DC500V  
Withstand voltage: AC2000V / 1 min

Mechanical  
Temp. Range: -40 °C ~ +105 °C

Order Information

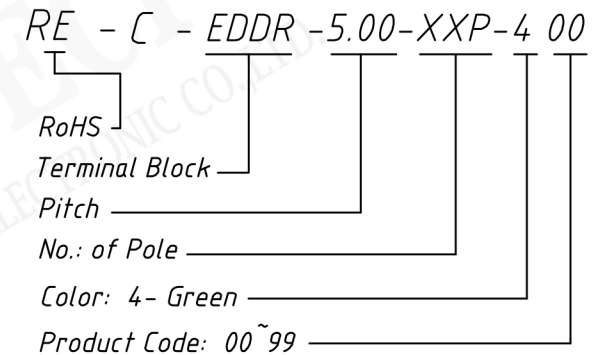


TOLERANCES EXCEPT AS NOTED

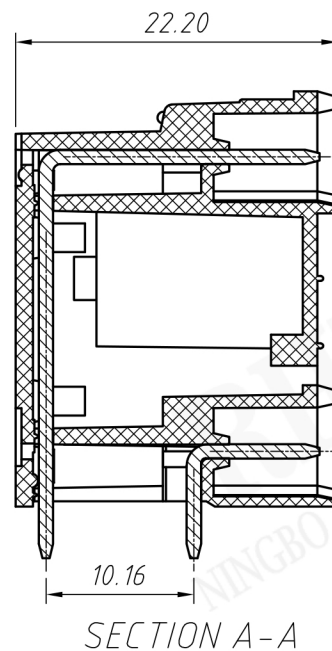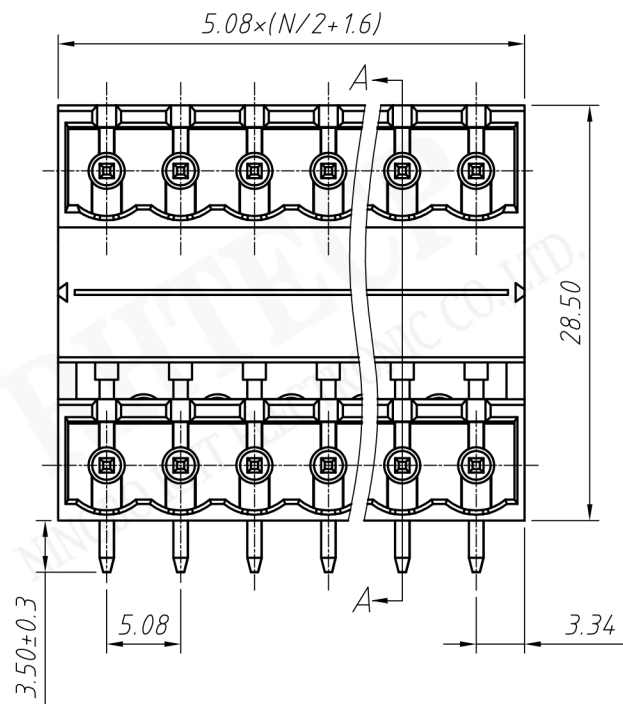

**Material**  
**Housing:** PA66, UL94V-0  
**Pin header:** Brass, Tin plated

**Electrical**  
**Rated voltage:** 300V  
**Rated current:** 15A  
**Contact Resistance:** 20 mΩ  
**Insulation resistance:** 500MΩ/DC500V  
**Withstand voltage:** AC2000V / 1 min

**Mechanical**  
**Temp. Range:** -40 °C ~ +105 °C

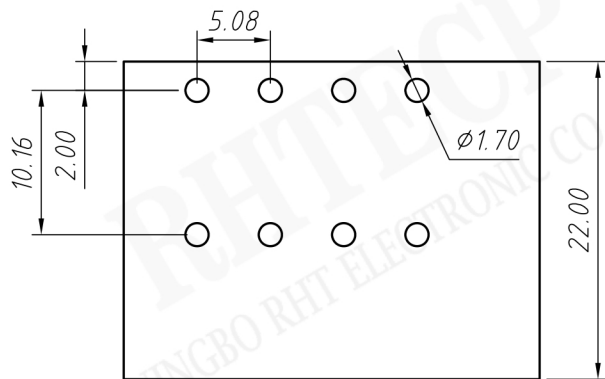

TOLERANCES EXCEPT AS NOTED

**Order Information**

RE - C - EDDR - 5.08 - XXP - 4 00

RoHS  
Terminal Block  
Pitch  
No.: of Pole  
Color: 4 - Green  
Product Code: 00 ~ 99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE:A4

SCALE: ---



> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5

TERMINAL BLOCK