



Material
 Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated
 Screws: M3, Steel, Zn plated

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min
 Wire Range: 28~14AWG 1.5mm²

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Strip length: 7.8mm
 Torque: 0.5m(4.43Lbin)

Order Information

RE - C - ELK - 5.08 - XXP - 4 S 00

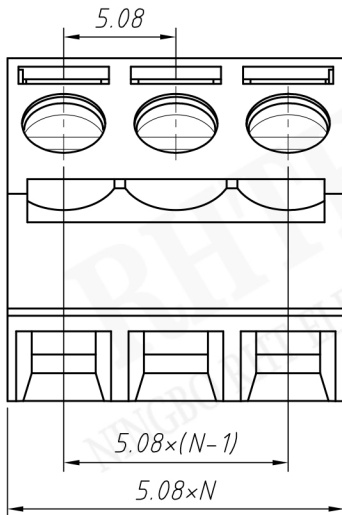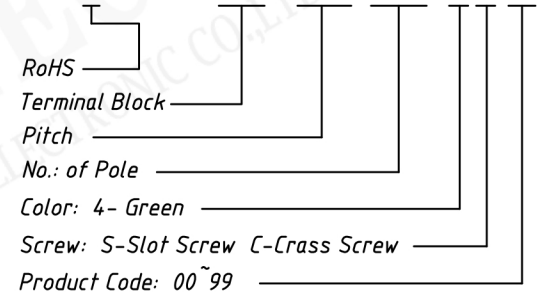

UNITS:mm	SHEET SIZE:A4		SCALE: ---	First angle projection TERMINAL BLOCK
> 0~3	> 3~18	> 18~50	> 50~120	
± 0.12	± 0.15	± 0.3	± 0.5	