


PCB LAYOUT




Material
Housing: PA66, UL94V-0
Screws: M3 Steel, Zn plated
Cage: Brass, Zn plated
Clamp: Phosphor bronze, Ni Plated

Electrical
Rated voltage: 300V
Rated current: 10A
Contact Resistance: 20 mΩ
Insulation resistance: 5000MΩ/DC1000V
Wire range: 28-14 AWG 2.5mm²
Withstand voltage: AC2000V / 1 min

Mechanical
Torque: 0.5NM(4.5Lb.in)
Steip length: 7-8mm
Temp. Range: -40 °C ~ + 105 °C

Order Information

RE - C - EDKP - 5.00 - XXP - 4 S 00

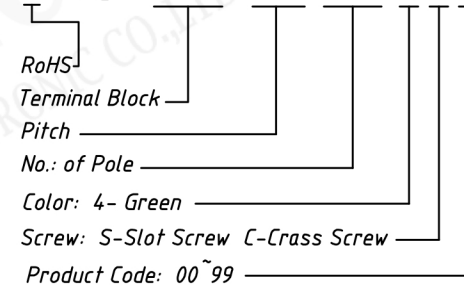

UNITS:mm	SHEET SIZE:A4		SCALE: ---	First angle projection TERMINAL BLOCK
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120	
± 0.12	± 0.15	± 0.3	± 0.5	