
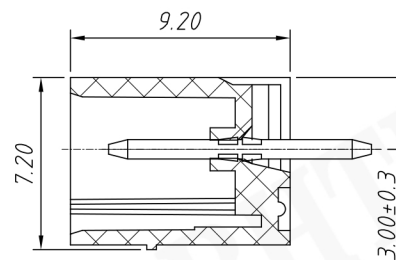


Material
Housing: PA66, UL 94V-0
Pin header: Brass, Tin plated

Electrical
Rated voltage: 300V
Rated current: 8A
Contact Resistance: 20 m Ω
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min

Mechanical
Temp. Range: -40 °C ~ +105 °C

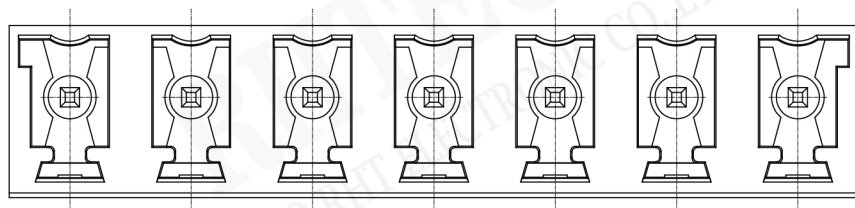

Order Information

RE - C - EDK FV - 5.08 - XXP - 4 00

RoHS _____
Terminal Block _____
Pitch _____
No.: of Pole _____
Color: 4- Green _____
Product Code: 00 ~ 99 _____