


SECTION A-A

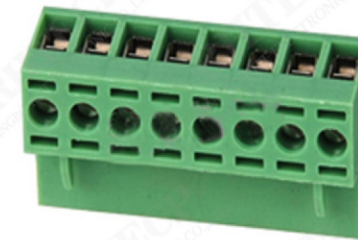

RE-C-EDKF-5.08 Series Pitch=5.08mm

Electrical :

Rated voltage: 300V
 Rated current: 10A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC2000V/1Min
 Wire range: 28-12AWG 2.5mm²


Material

Screws: M2.5 steel Zinc plated
 Contact: Phosphor bronze
 Housing: PA66, UL94V-0


Mechanical

Temp. Range: -40°C~+105°C
 MAX Soldering: +250°C for 5 Sec.
 Torque: 0.4Nm (3.6lb.in)
 Strip length: 7-8mm

Product NO.: RE-C-EDKF-5.08-XXP X X X

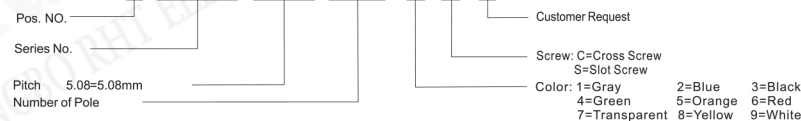

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		



TERMINAL BLOCK