



PCB LAYOUT

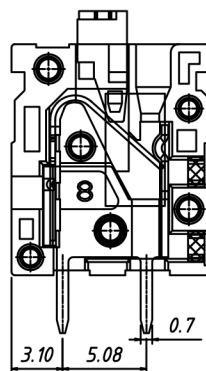

SECTION A-A



**Material**

Shrapnel: Stainless steel  
 Pin header: Brass , Tin plated  
 Housing: PA66 , UL94V-0

**Electrical**

Rated voltage: 150V  
 Rated current: 5A  
 Wire range: 26~18AWG 1.0mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC1300V / 1 min

**Mechanical**

Temp. Range: -40 °C ~ +105 °C  
 Soldering: 250°C±5°C for 5S  
 Strip length: 9~10 mm

**Order Information**

RE - C - 211V - 2.50 - XXP - 4 XX

RoHS  
 Terminal Block  
 Pitch  
 No.: of Pole

Product Code:00~99  
 Color: 4-Green