


SECTION A-A

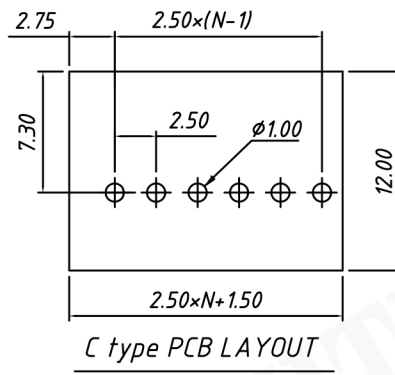

C type PCB LAYOUT

Material

Pin header: Phosphor bronze , Tin plated

Housing: PA66 , UL 94V-0

Electrical

Rated voltage: 300V

Rated current: 4A

Wire range: 28~20AWG 0.5mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min

Mechanical


Temp. Range: -40 °C ~ +105 °C

Soldering: 250 °C±5 °C for 5S

Strip length: 9~10 mm

Order Information

RE - C - 2.50V-5.00-XXP-1 C

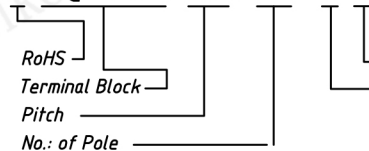

Product Code:C
Color: 1-Gray
5-Orange