



SECTION A-A

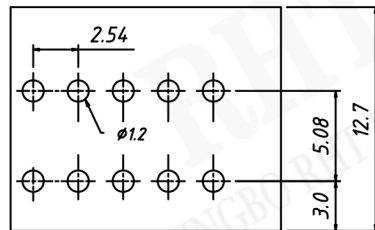

PCB LAYOUT



Material

Shrapnel: Stainless steel

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 150V

Rated current: 2A

Wire range: 26~18AWG 1.0mm<sup>2</sup>

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC1300V / 1min

Mechanical

Temp. Range: -40 °C ~ +105 °C

Soldering: 250°C±5°C for 5S

Strip length: 9~10 mm

Order Information

RE - C - 141V - 2.54 - XXP - 4 XX

