


PCB LAYOUT



SECTION A-A

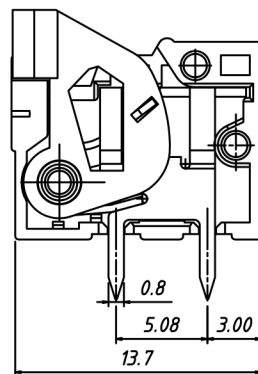

Material

Shrapnel: Stainless steel

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 150V

Rated current: 2A

Wire range: 26~18AWG 1.0mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC1300V / 1 min

Mechanical


Temp. Range: -40 °C ~ +105 °C

Soldering: 250°C±5°C for 5S

Strip length: 9~10 mm

Order Information

RE - C - 14 1R - 2.54 - XXP - 4 XX

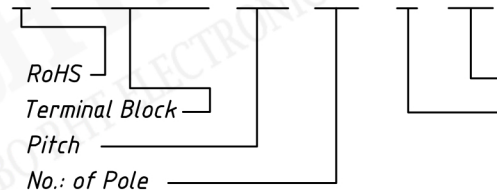

Product Code: 00~99
Color: 4-Green