


SECTION A-A

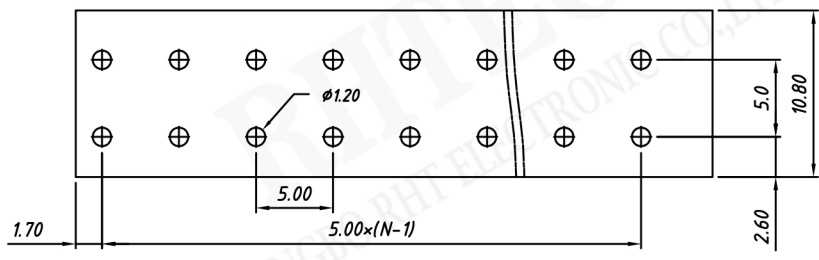

PCB LAYOUT

*Material*  
 Housing: PA66, UL94V-0  
 Pin header: Brass, Tin plated  
 Wire guard: Stainless steel

*Electrical*  
 Rated voltage: 300V  
 Rated current: 8A  
 Wire range: 22~16AWG 1.5mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1 min

*Mechanical*  
 Temp. Range: -40 °C ~ +105 °C  
 Soldering: 250 °C ± 5 °C for 5S  
 Strip length: 9~10mm

*Order Information*

RE - C - 236 - 5.00 - XXP - 1 xx

RoHS  
 Terminal Block  
 Pitch  
 No.: of Pole

Product Code: 00~99  
 Color: 1-Gray

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		