

Material

Housing: PA66, UL94V-0

Pin header: Brass, Tin plated

Wire guard: Stainless steel

Electrical

Rated voltage: 300V

Rated current: 10A

Wire range: 22~16AWG 1.5mm²

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min

Mechanical


Temp. Range: -40 °C ~ +105 °C

Soldering: 250 °C ± 5 °C for 5S

Strip l

Order Information


RE - C - 5.00V - 15.0 - XXP - 1 xx

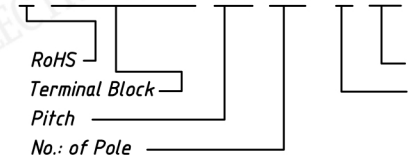

Product Code: 00~99

Color: 1-Gray

4-Green

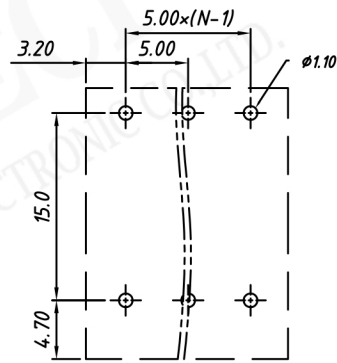

PCB LAYOUT