


SECTION A-A

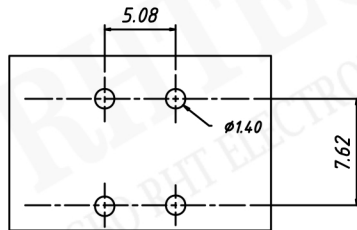

PCB LAYOUT

**Material**

Shrapnel: Stainless steel

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

**Electrical**

Rated voltage: 300V

Rated current: 10A

Wire range: 22~16AWG 1.5mm<sup>2</sup>

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min

**Mechanical**


Temp. Range: -40 °C ~ +105 °C

Soldering: 250°C±5°C for 5S

Strip length: 9~10 mm

**Order Information**

RE - C - 142V-5.08-XXP-4 XX



Product Code: 00~99  
Color: 4-Green