


SECTION A-A



Material

Shrapnel: Stainless steel
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0

Electrical




Rated voltage: 300V
 Rated current: 10A
 Wire range: 22~16AWG 1.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min

Mechanical

Temp. Range: -40 °C ~ +105 °C
 Soldering: 250°C±5°C for 5S
 Strip length: 9~10 mm

Order Information

RE - C - 142R - 5.08 - XXP - 4 XX

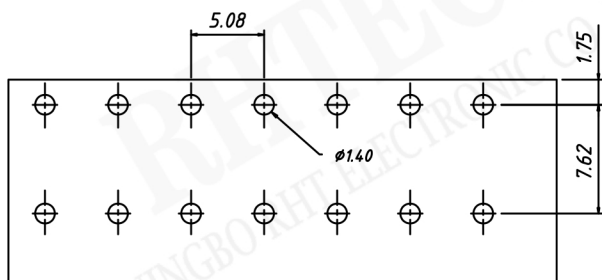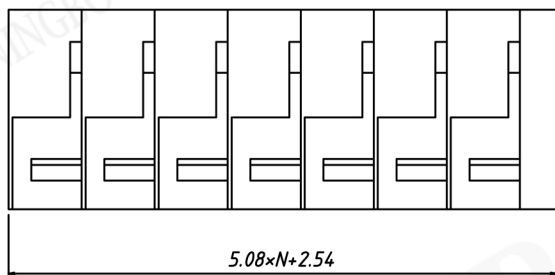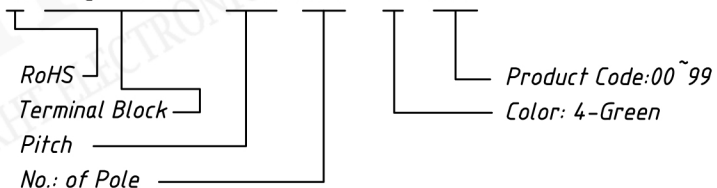

PCB LAYOUT