

Material

Shrapnel: Stainless steel

Pin header: Brass, Tin plated

Housing: PA66, UL94V-0

Electrical

Rated voltage: 300V

Rated current: 10A

Wire range: 22~16AWG 1.5mm<sup>2</sup>

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V / 1 min



Mechanical

Temp. Range: -40 °C ~ +105 °C

Soldering: 250°C ±5°C for 5S

Strip length: 9~10 mm

SECTION A-A

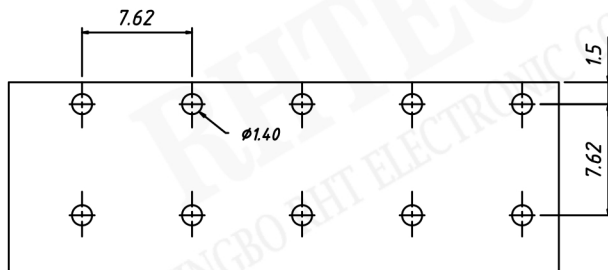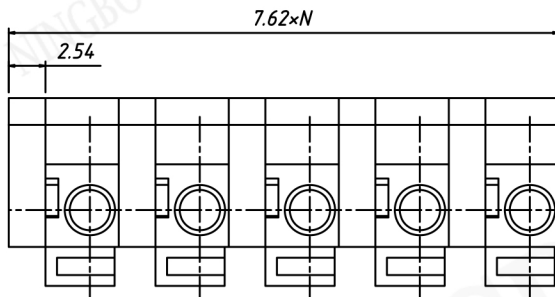

PCB LAYOUT

Order Information

RE - C - 142V - 7.62 - XXP - 4 XX

RoHS  
Terminal Block  
Pitch  
No.: of Pole

Product Code: 00~99  
Color: 4-Green