

SECTION A-A

Material


Screw: M3.0, Steel, Ni Plated
 Pin header: Brass, 0.8t, Tin Plated
 Housing: PA66, UL94V-0, Black

Electrical

Rated voltage: 300V
 Rated current: 15A
 Wire range: 22~14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min

Mechanical

Temp. Range: -40 °C ~ +105 °C
 Torque: 0.5Nm (4.5Lb.in)

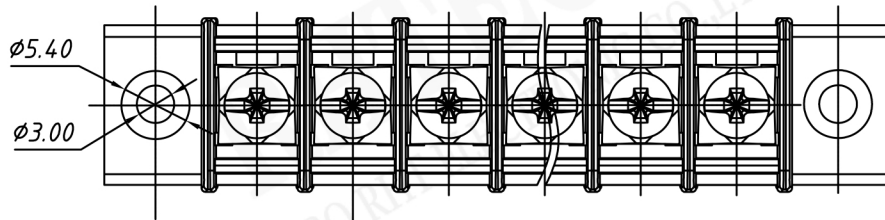

Order Information

RE - C - 25 C - 6.72 - XXP - A

- A: With Ears
- No.: of Pole
- Pitch: 6.72mm
- Pin Type:
- Barrier Terminal Block
- Without Cover
- RoHS

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0~ 3	± 0.12	> 3~ 18	± 0.15	> 18~ 50	± 0.3
				> 50~ 120	± 0.5