

SMT Buzzer Series

RE-B-PB-23 *16 WithCircuit PiezoBuzzer Series

SPECIFICATION



RatedVoltage :	12V _{DC}
OperatingVoltage :	8-24V _{DC}
Max.RatedCurrent :	15mAat12V _{DC}
Min.S.P.L.(@30cm) :	88dBat12V _{DC}
ResonantFrequency :	3.3±0.5KHz
ToneNature :	Continuous
OperatingTemp :	-20~+80 °C
Weight :	5g

ORDERINFORMATION

ProductNO.: RE-B- PB - 23*16-A

PartNumber _____ OrderCode
PiezoBuzzerSeries _____

OrderCode	Rated Voltage	Operating Voltage	Max.Rated Current	Min.S.P.L. (@30cm)	Resonant Frequency	Tone Nature	Operating Temp	Weight
RE-B-PB-23*16-A	3V _{DC}	8-24V _{DC}	25mA	80dB	3.4±0.5KHz			
RE-B-PB-23*16-B	6V _{DC}	8-24V _{DC}	20mA	82dB	3.4±0.5KHz			
RE-B-PB-23*16-C	9V _{DC}	8-24V _{DC}	15mA	88dB	3.3±0.5KHz	Continuous	-20~+80 °C	5g
RE-B-PB-23*16-C	12V _{DC}	8-24V _{DC}	15mA	88dB	3.3±0.5KHz			
RE-B-PB-23*16-D	24V _{DC}	8-24V _{DC}	20mA	88dB	3.1±0.5KHz			

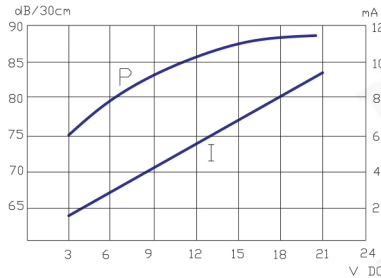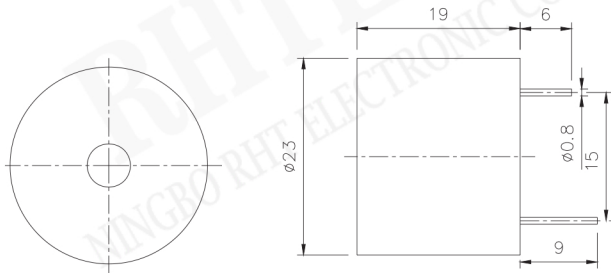

SMT Buzzer Series

RE-B-PB-23*19 With Circuit Piezo Buzzer Series

SPECIFICATION

Rated Voltage:	12V _{DC}
Operating Voltage:	8-24V _{DC}
Max. Rated Current:	15mA at 12V _{DC}
Min. S.P.L. (@ 30cm):	88dB at 12V _{DC}
Resonant Frequency:	3.3 ± 0.5KHz
Tone Nature:	Continuous
Operating Temp:	-20 ~ +80°C
Weight:	5g

ORDER INFORMATION

Product NO.: RE-B- PB - 23*19-A

Part Number _____ Order Code _____
Piezo Buzzer Series _____

Order Code	Rated Voltage	Operating Voltage	Max. Rated Current	Min. S.P.L. (@30cm)	Resonant Frequency	Tone Nature	Operating Temp	Weight
RE-B-PB-23*19-A	3V _{DC}	8-24V _{DC}	25mA	80dB	3.4 ± 0.5KHz			
RE-B-PB-23*19-B	6V _{DC}	8-24V _{DC}	20mA	82dB	3.4 ± 0.5KHz			
RE-B-PB-23*19-C	9V _{DC}	8-24V _{DC}	15mA	88dB	3.3 ± 0.5KHz	Continuous	-20~+80°C	5g
RE-B-PB-23*19-C	12V _{DC}	8-24V _{DC}	15mA	88dB	3.3 ± 0.5KHz			
RE-B-PB-23*19-D	24V _{DC}	8-24V _{DC}	20mA	88dB	3.1 ± 0.5KHz			