

Unit:mm




Omni-direction mini microphone MM6015 Serie


Specifications:

- Sensitivity(1KHz,0dB=1V/Pa): $-40\pm 3\text{dB}$; $-42\pm 3\text{dB}$; $-44\pm 3\text{dB}$
- Directivity:Omnidirectional
- Impedance:2.2K Ω Max.
- Current consumption:0.5mA Max.
- Operation voltage:1.0~10V
- S/N ratio:60dB Min.
- Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V
- Std. Test Condition:94dB S.P.L @1KHz VS=2.0V
- Frequency:20~16,000Hz

Frequency response

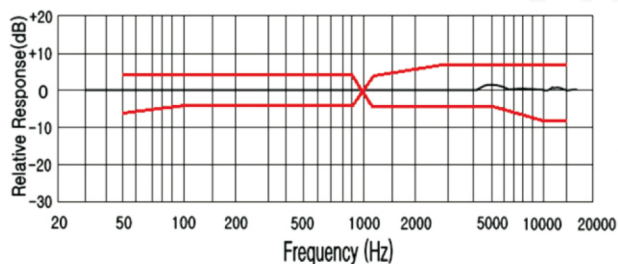

Schematic diagram VS=2V RL=2.2K

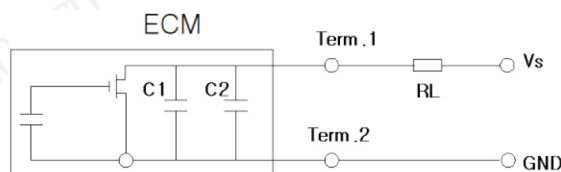

ORDER INFORMATION

Product NO.: RE-B - MM 6015 P - 443

Omni-Direction mini microphone Series
 Dimensions
 Note: Soldering
 P: Pin Type
 W: Wire type
 Sensitivity