

Unit:mm

Omni-direction mini microphone MM6050P Serie

Specifications:

Sensitivity(1KHz,0dB=1V/Pa): -34±3dB;-36±3dB; -38±3dB;
-40±3dB;-42±3dB; -44±3dB

Directivity:Omnidirectional

Impedance:2.2KΩ Max.

Current consumption:0.5mA Max.


Operation voltage:1.0~10V

S/N ratio:60dB Min.


Sensitivity vs. Voltage:3dB Max. at VS=2.0V~1.5V

Std. Test Condition:94dB S.P.L @1KHz VS=2.0V

Frequency:20~16,000Hz

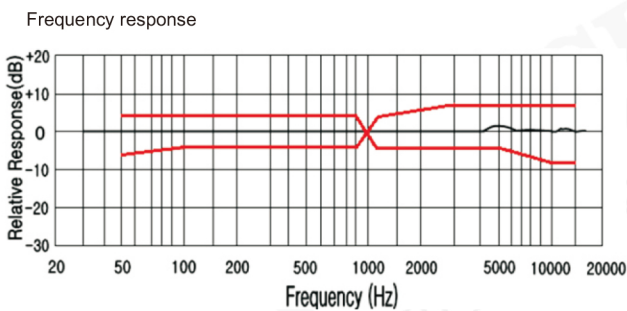

Schematic diagram VS=2V RL=2.2K

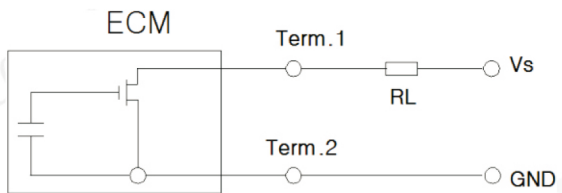

ORDER INFORMATION

Product NO.: RE-B - MM 6050P P - 443



UNITS:mm	SHEET SIZE:A4		SCALE: ---
> 0~3	> 3~18	> 18~50	> 50~120
± 0.12	± 0.15	± 0.3	± 0.5



BUZZER