

PHOTO ONLY FOR REFERENCE

NOTE:



1.MATERIAL:

- a.HOUSING:PA66
- b.CONTACT:BRASS
(SURFACE PLATING: Sn 100u"-120u")

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
- c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
- d.OPERATING TEMPERATURE: -25°C~ +85°C

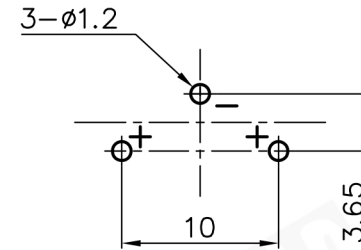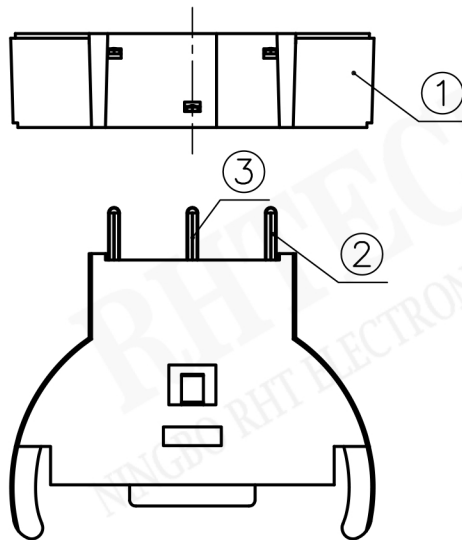

PCB Layout Diagram
Top View

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.30 X :±1°
X.X :±0.25 X.X:±0.5°
X.XX :±0.20
X.XXX:±0.10

WEIGHT: g

SHEET 1 OF 1

③	TERMINAL(-)	1	BRASS, T=0.25mm	Sn Plating
②	TERMINAL(+)	1	BRASS, T=0.25mm	Sn Plating
①	HOUSING	1	PA66	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR