


P/N:RE-C-MMCX001

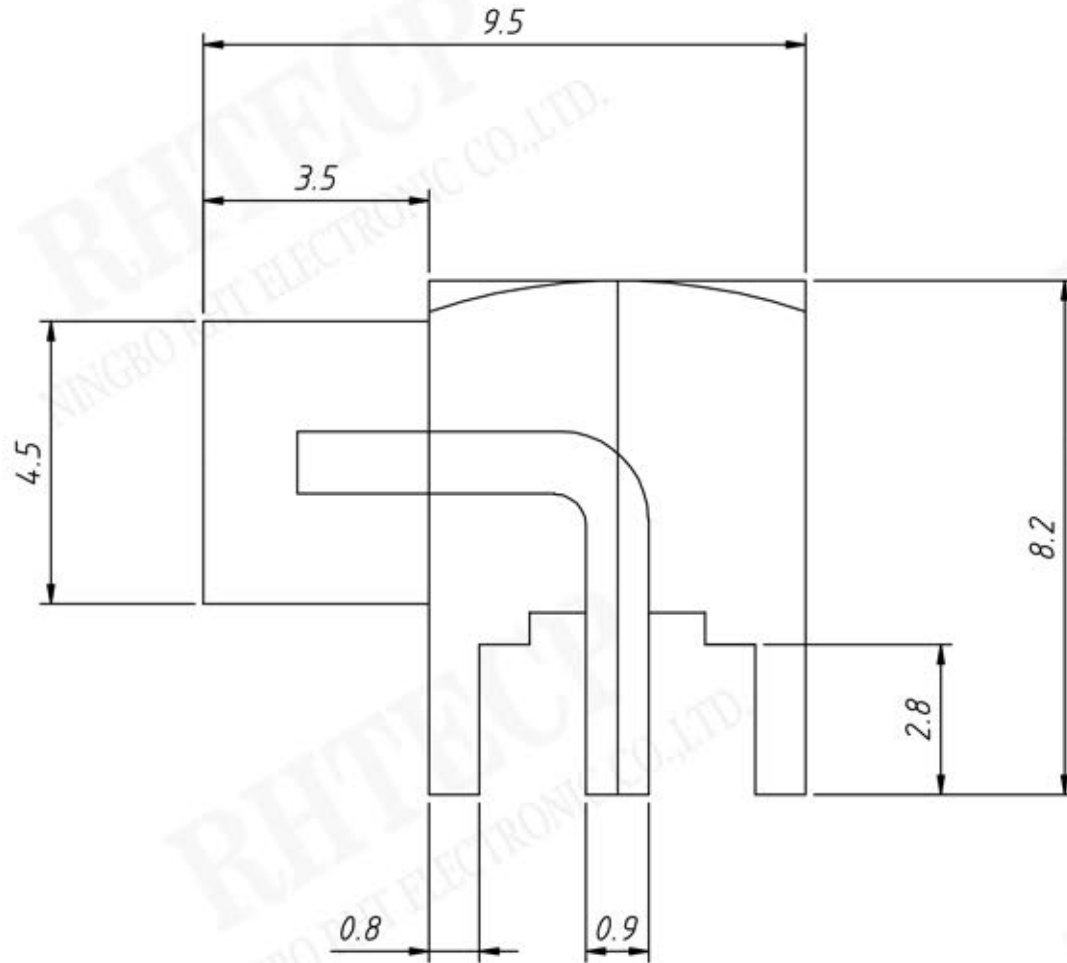

*Electrical Specifications*

*Impedance: 50 Ω*

*Frequency Range: DC - 6 GHz*

*Contact Resistance:*

*Center Contact: ≤ 5 mΩ*

*Outer Contact: ≤ 2.5 mΩ*

*Insulation Resistance: 10,000 MΩ Min.*

*Insertion Loss Max.: 0.10 dB @ 1 GHz*

*Dielectric Withstanding Voltage: 1,000 Vrms (at sea level)*

*Mechanical*

*Durability (matings) 500 cycles Min.*

*Temperature Range -55°C to +155°C*