

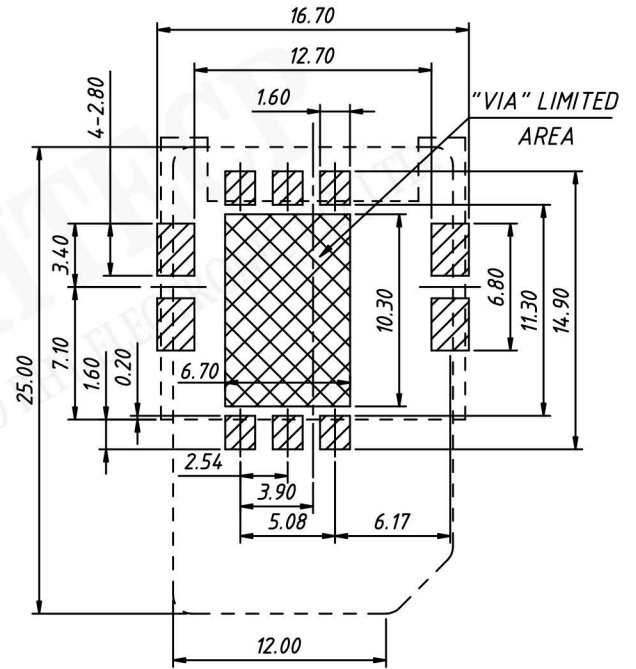

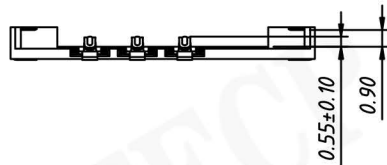


P/N: RE-C-SIM-015B

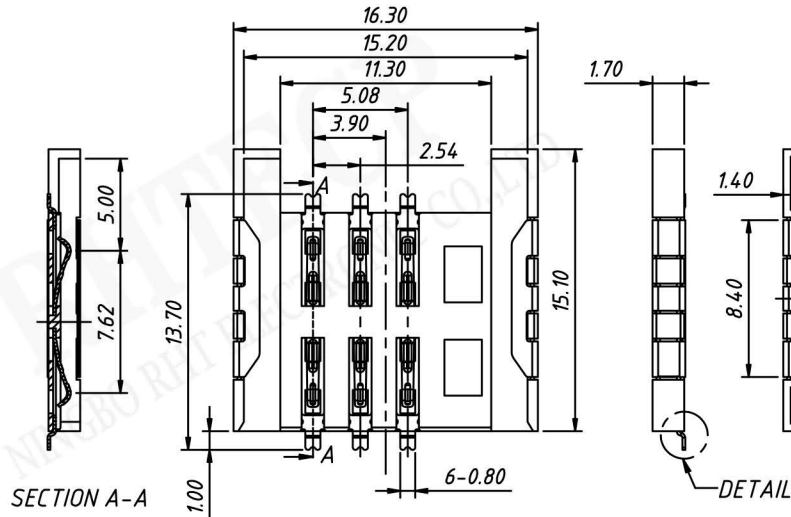

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05

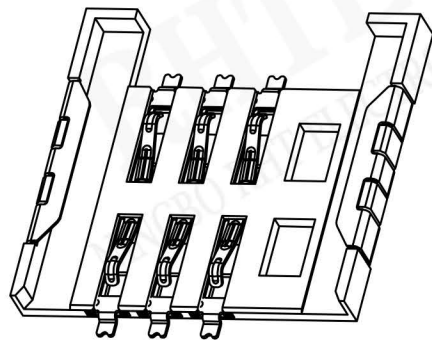

Electrical:
 Current Rating: 1.0 A max.
 Contact Resistance: 30mΩ Max.
 Dielectric Withstanding Voltage:
 500V AC RMS For One Minute.
 Insulation Resistance: 1000MΩ Min. At 500V DC
 Operating Temperature: -40°C TO +85°C.
 Operating Temperature: -45°C ~ +105°C

Material:
 Housing: Hi-Temp. Plastic, UL 94V-0. Black.
 Terminal: Copper Alloy, (T=0.15mm), Gold Plated Over Nickel.
 Fork: Copper Alloy, (T=0.20mm), Tin Plated Over Nickel.