
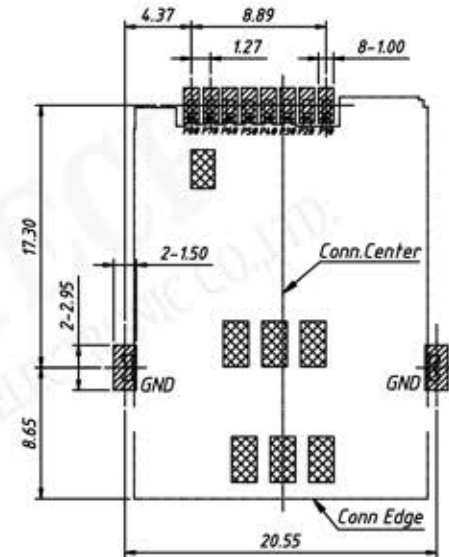



Finish:

Contact: Gold Flash Plated On Contact Area; Gold Flash Plated On Solder Tails, With Entire Contact Underplated 50u" min Nickel.

Shell: 50u" min Nickel Underplated Overall, Gold Flash Plated On Solder Tails.

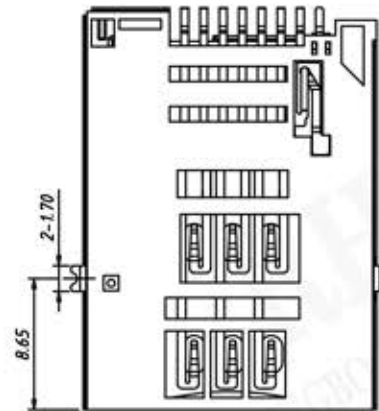

RECOMMENDED PCB LAYOUT (TOP VIEW)

GENERAL TOLERANCES: ±0.05

- SOLDER AREA
- NONE CIRCUIT DIAGRAM AREA

Material:

Housing: LCP, UL 94 V-0

Contact: C5210R-H, T=0.15

Shell: SUS304, T=0.20

Mylar: Polyester.

Circuit Diagram for Card Detect Switch

INSERT CARD

(NORMAL ON)

CD SW

LOWER

CD SW

UPPER

WITHOUT CARD

(NORMAL OFF)

CD SW

LOWER

CD SW

UPPER