
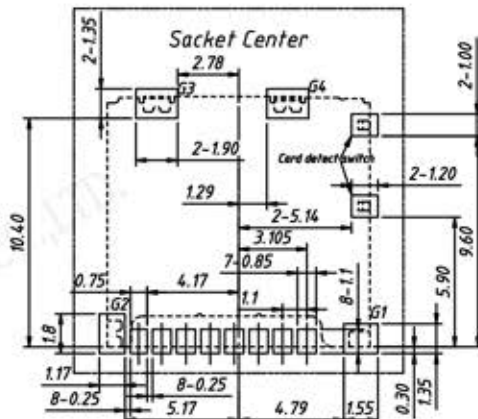


P/N: RE-C-TF-015

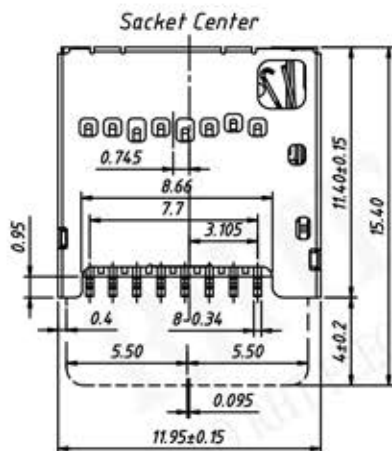

RECOMENDED PCB LAYOUT
TOLERANCK:±0.05

Material:




Metal shell:Stainless Steel,Nickel overall 50u"

Housing:Lioid crystal polymer,UL94 V-0. Black.


Contact terminals:Phosphor Bronze.Contact:Gold flash;Solder Tail:Gold 1u" Min.

Detect Terminal:Phosphor Bronze.Contact:Gold flash;Solder Tail:Gold 1u" Min.

Switch Terminal:Phosphor Bronze.Contact:Gold flash;Solder Tail:Gold 1u" Min.

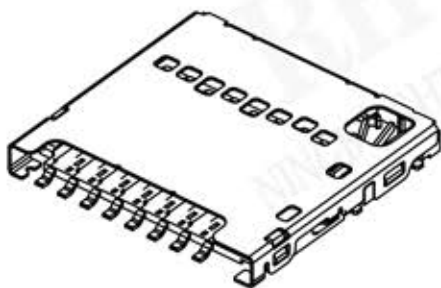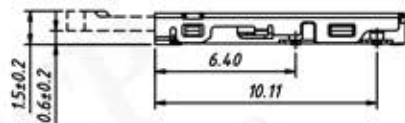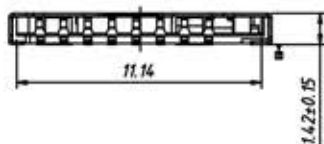

micro SD card
back view

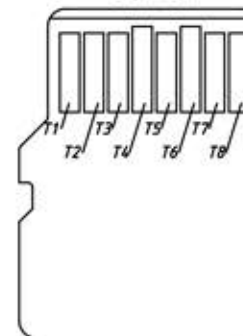

MICRO SD CARD PIN-MAP

PIN NUMBER	DESCRIPTION
T1	DAT2
T2	CD/DAT3
T3	CMD
T4	VDD
T5	CLK
T6	VSS
T7	DAT0
T8	DAT1

card insertion conation	card detect switch	Circuit Switch terminal detect terminat
Without Card	Open	
Card insertion	Close	