


Note:

- 1: V.S.W.R: 1.5(0~3G), Max.
- 2: Wire surface shall have no dirt, broken.
- 3: Connector surface with coating, oxidation phenomenon.
- 4: Connector pins and insulator are in the same plane

Order Information

RE - ANT - RFCA10 - RG316 - L300

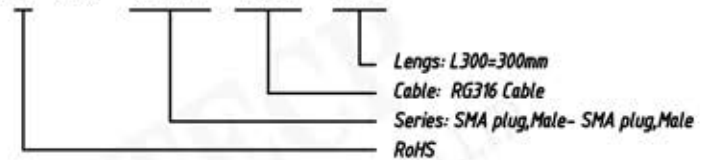

No.	Name	Description	UNITS	Q'ty
4	Connector	SMA Plug, Male Straight, for RG316	PCS	1
3	RF Cable	RG316 Cable, Brown, OD2.5mm	mm	L
2	Heat-Shrink Tube	∅2.5mm Heat-Shrink Tube, Block, L15mm	PCS	2
1	Connector	SMA Plug, Male Straight, for RG316	PCS	1

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		