


Note:

- 1: V.S.W.R: 1.5(0~3G), Max.
- 2: Wire surface shall have no dirt, broken.
- 3: Connector surface with coating, oxidation phenomenon.
- 4: Connector pins and insulator are in the same plane

Order Information

RE - ANT - RFCA11 - OD1.13 - L300 / X

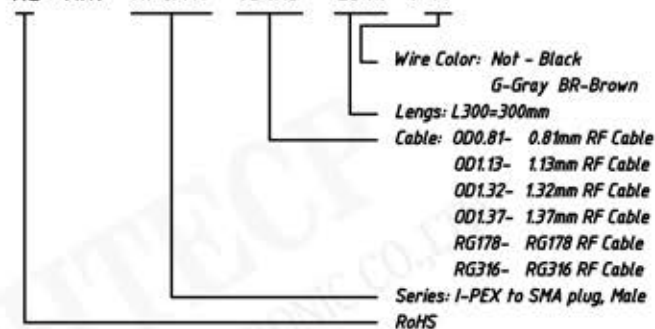

No.	Name	Description	UNITS	Q'ty
4	Connector	SMA plug, Male Straight, for RG178, RG316, 0.81, 1.13, 1.32, 1.37mm	PCS	1
3	RF Cable	RG178, RG316, 0.81, 1.13, 1.32, 1.37mm Cable	mm	L
2	Heat-Shrink Tube	∅1.0mm Heat-Shrink Tube, Block, L15mm	PCS	2
1	Connector	I-PEX Plug, for RG178, RG316, 0.81, 1.13, 1.32, 1.37mm Cable	PCS	1