

Specification:

Frequency : 824 ~ 960/1710 ~ 2170MHz

Gain : 2dBi

Vswr : 2.0 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power : 10W

Connector : RP SMA-J


Cable: RG174, Black

Length:3000mm


Mounting Method:Screw

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

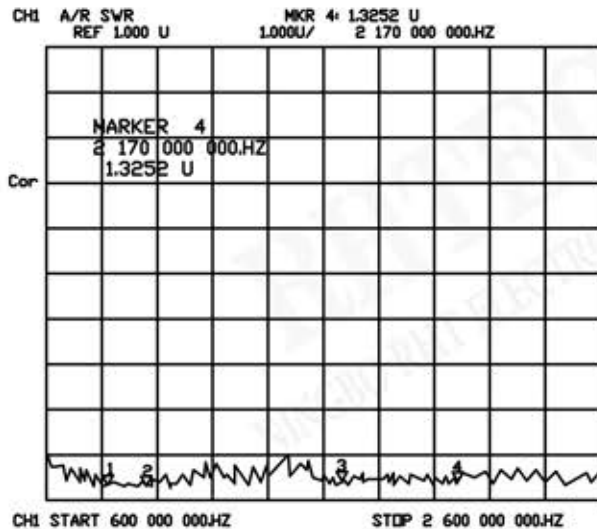

Order Information

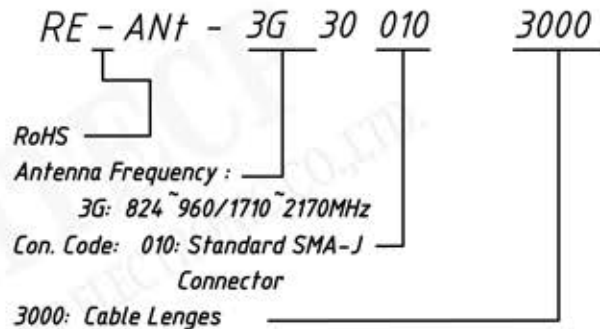

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		