

Specification:

Frequency : 890~960/1710~1880MHz

Gain : 2dBi

Vswr : 2.0 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power : 50W

Shell material : PVC

Size: Ø29.5x109mm


Connector : SMA or Other

Cable: RG174, Black


Length:3000mm or Other

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

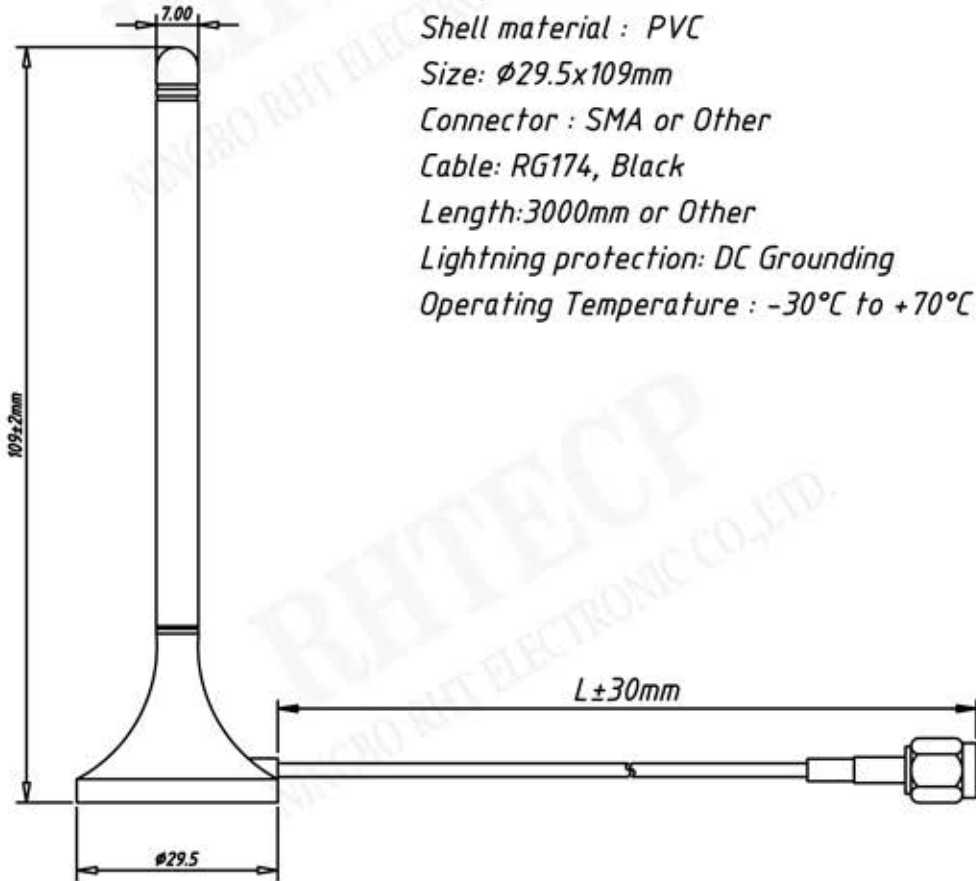

CH1 A/R SWR REF 1.000 U MKR 1: 1.4252 U
1.000U/ 890 000 000.Hz

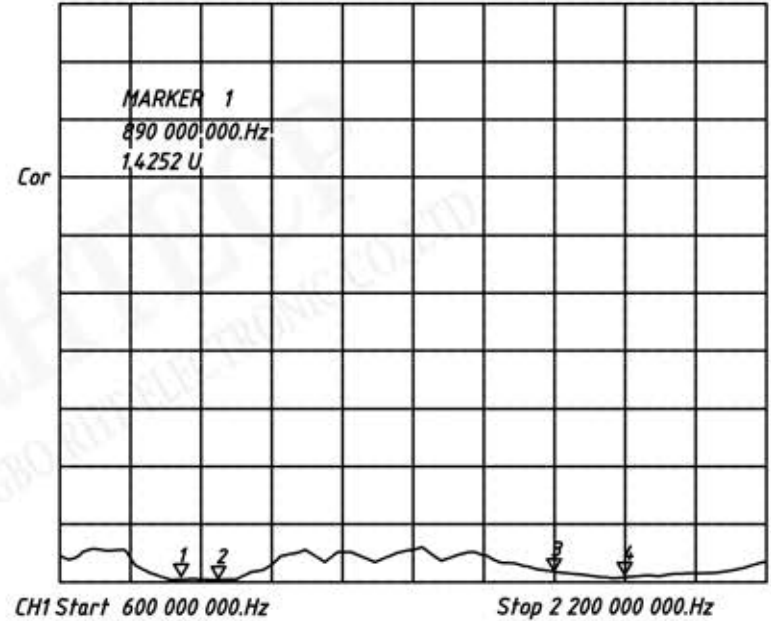

Order Information

RE - ANT - GSM06 010 110 3000

RoHS
Antenna Frequency :
GSM: 890~960/1710~1880MHz

Con. Code: 010: Standard
SMA Connector

Height: 110~ 110mm

3000: Cable Lenges