



Specification:
 Frequency : 2400 ~ 2500MHz
 Gain : 2dBi
 Vswr : 1.5 Max.
 Impedance : 50 Ω
 Polarization : Vertical
 Radiation : OMNIDIRECTIONAL
 Max power : 50W
 Shell material : PVC
 Size: $\phi 29.5 \times 109$ mm
 Connector : SMA
 Cable: RG174, Black
 Length: 3000mm or Other
 Lightning protection: DC Grounding
 Operating Temperature : -30°C to +70°C

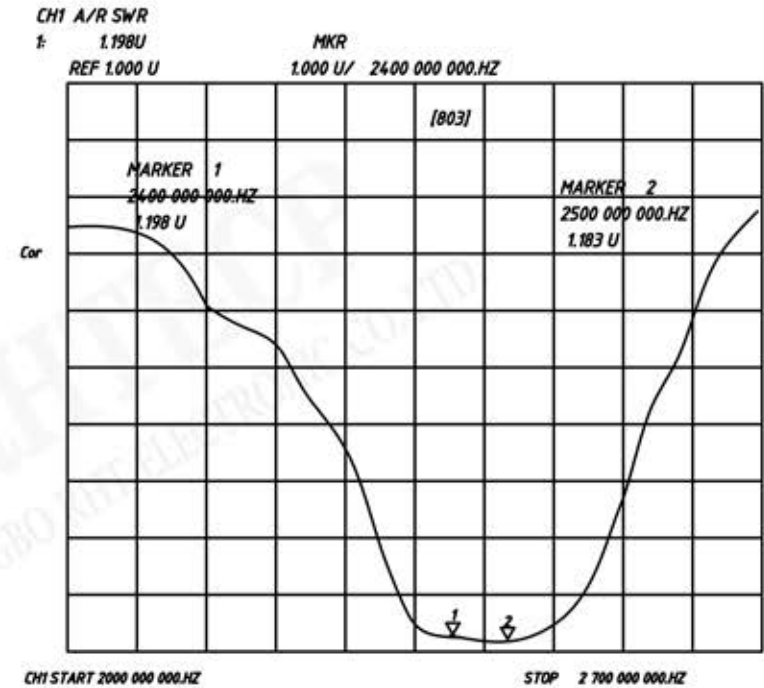

Order Information

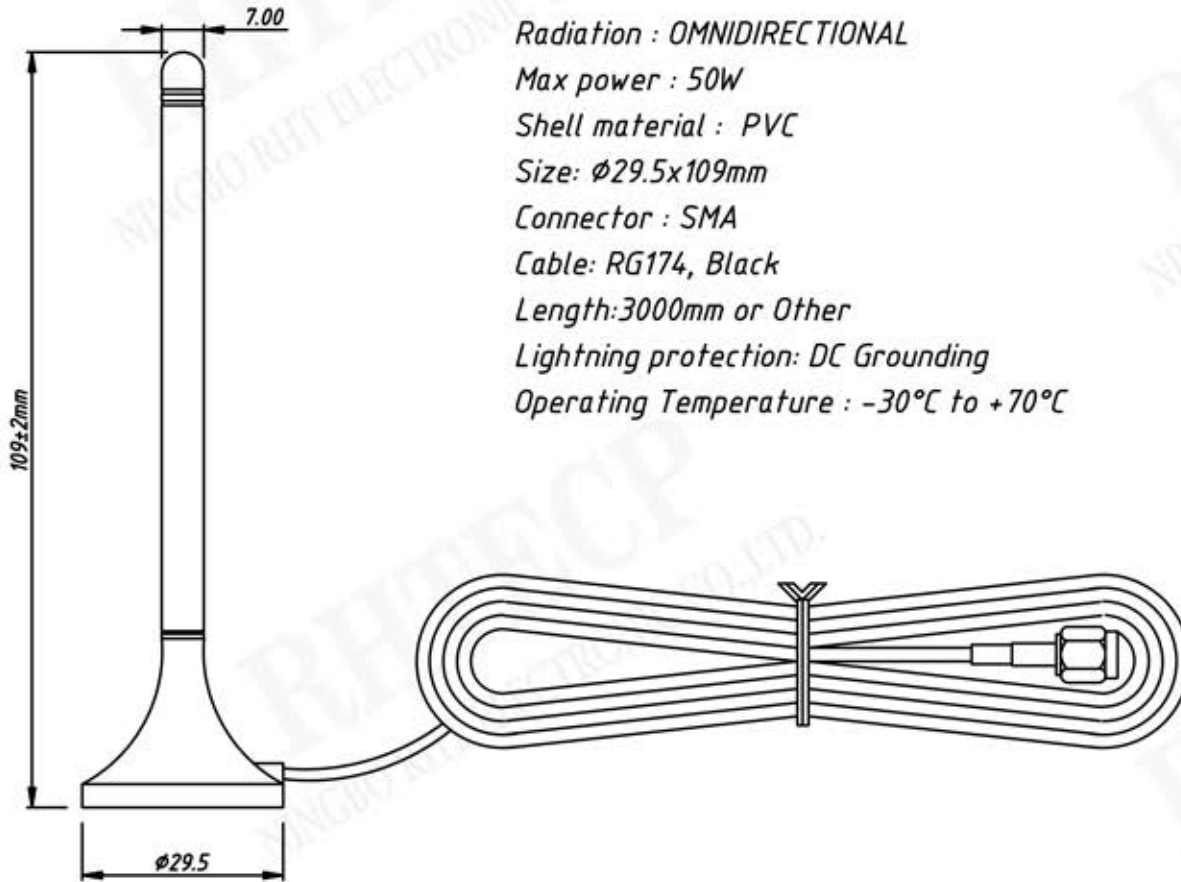