

Specification:

Frequency : 2400 ~ 2500MHz

Gain : 3dBi

Vswr : 1.5 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power : 20W

Size: $\phi 29.5 \times H \times L$ mm


Connector : SMA

Cable: RG174, Black

Length: 3000mm or Other

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

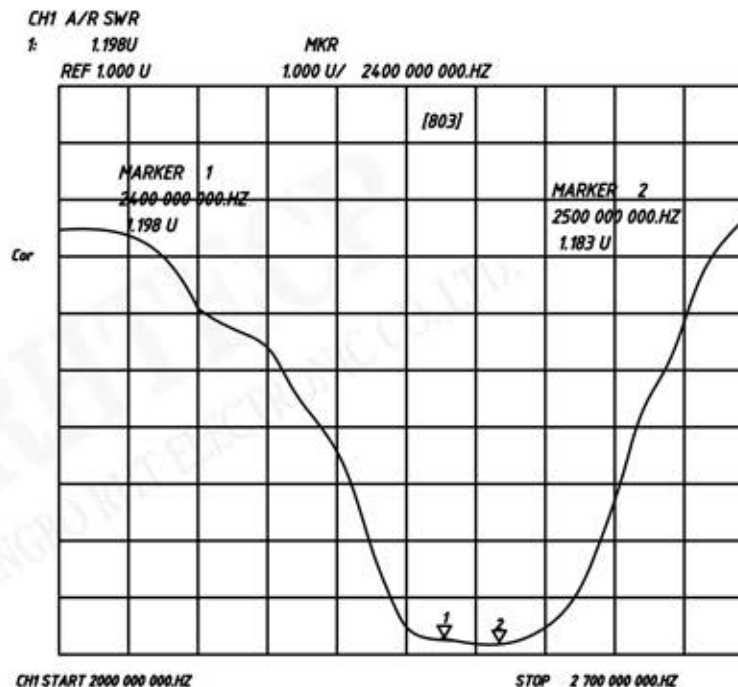

Order Information

