


*Order Information*

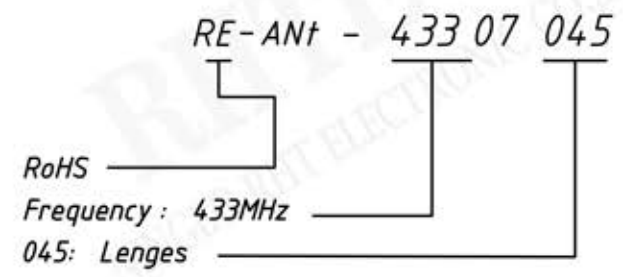

*Specification:*  
 Frequency : 433±10MHz  
 Gain : 2dBi  
 Vswr : 2.0 Max.  
 Impedance : 50 Ω  
 Polarization : Vertical  
 Radiation : OMNIDIRECTIONAL  
 Connector : SMA-J  
 Lightning protection: DC Grounding  
 Operating Temperature : -30°C to +70°C

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0 ~ 3	> 3 ~ 18	> 18 ~ 50	> 50 ~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		