


Specification:
GPS Antenna
 Center Frequency: 1575.42±3MHz
 Band Width: CF±5MHz
 Polarization:RHCP
 Gain:5dBic
 V.S.W.R:<1.5
 Impedance:50Ω
 Axial Ratio:3dB (max)
 LAN
 Gain:28±2dB
 Noise Figure:<1.5
 Filter Insertion Loss:<3dB
 Ex-band Attenuation:12dB@CF+50MHz/16dB@CF-50MHz
 Supply Voltage:2.2~5V DC
 Current Consumption:5~15mA
 V.S.W.R:<2.0

GSM Antenna
 Frequency Range: 824~960MHz/1710~2170MHz
 V.S.W.R:<2.0
 Polarization:Linear
 Gain: 2.0dBi Max.
 Impedance:50Ω
 Cable:RG174
 Connector:SMA/MCX/FAKRA or others
 Radome Material:ABS
 Mounting Method:Magnet
 Operating Temperature :-40~85°C

Order Information

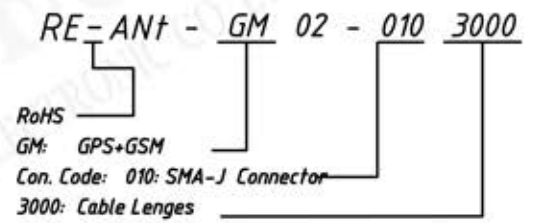

UNITS:mm		SHEET SIZE:A4		SCALE: ---	
> 0~ 3	> 3~ 18	> 18~ 50	> 50~ 120		
± 0.12	± 0.15	± 0.3	± 0.5		