



RECOMMENDED PCB LAYOUT  
GENERAL TOLERANCE ±0.05

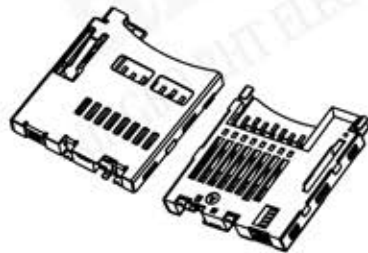

PIN NO.	MICRO SD
Pin 1	DAT2 1P
Pin 2	CD/DAT3 2P
Pin 3	CMD 3P
Pin 4	VDD 4P
Pin 5	CLK 5P
Pin 6	VSS 6P
Pin 7	DAT0 7P
Pin 8	DAT1 8P
Pin 9	CARD DETECT

Electrical:

Contact current rating:0.5A Max.

Contact resistance:100mΩ Max.

Insulation Resistance:250V DC or 300V AC for no less than 1 minute

Mating durability:10000 Cycles Min.

Insertion force:2.0kgf max.

Extraction force:0.5kgf min.

Operating Temperature range:-25°C TO +85°C