

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating : UL94V-0

Contacts: Phosphor Bronze

Plating: Gold Plating

Shield: Brass, Tin Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A


Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.


Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: -40°C ~ +70°C

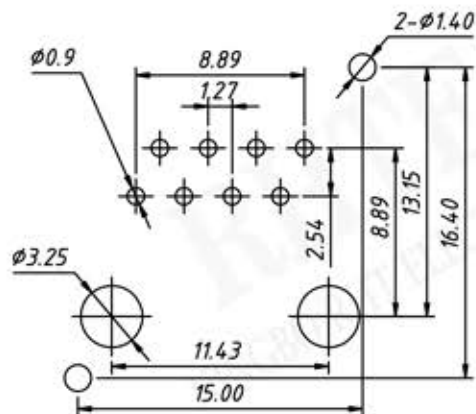

PCB Layout



Order Information

RE - C - 162 - 8P8C - W - XX

Contacts: 8P8C

Shield Code: W-With Shield

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating