
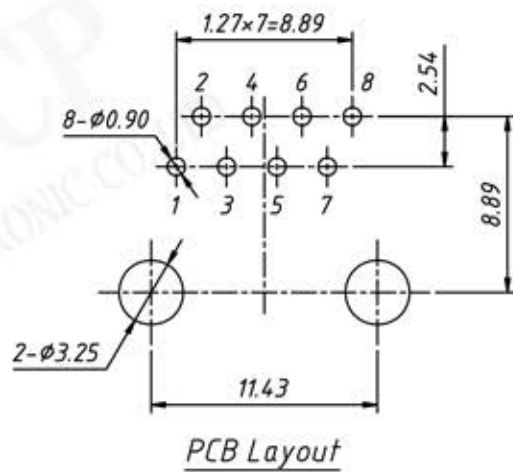


Material:  
 Housing: Engineering Thermoplastic  
 Flammability Rating : UL94V-0  
 Contacts: Phosphor Bronze  
 Plating: Gold Plating Over Nickel in Contact.  
 Tin Plating Over Nickel in Solder Area.

Electrical:  
 Voltage Rating: 125VAC  
 Current Rating: 1.5A  
 Contact Resistance: 40mΩ Max.  
 Insulation Resistance: 1000MΩ Min. @500VDC  
 Dielectric Strength: 1000VAC Rms 60Hz, 1 Min.  
 Durability: 750 cycles Min.  
 Operation Temperature: -20°C ~ +75°C

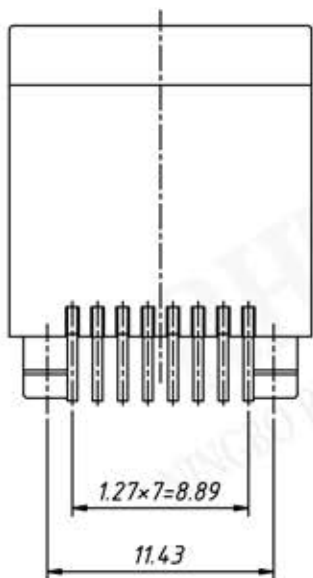

Order Information

RE - C - 152-8P8C-S-1-XX

Contacts: 8P8C  
 Color Code: 1-Black  
 Plating Code:  
 01-Fu" Gold Plating  
 02-3u" Gold Plating  
 03-6u" Gold Plating  
 04-15u" Gold Plating  
 05-30u" Gold Plating