



With Panel

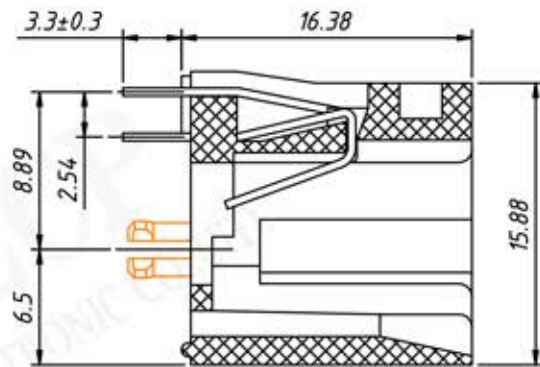

SECTION A-A

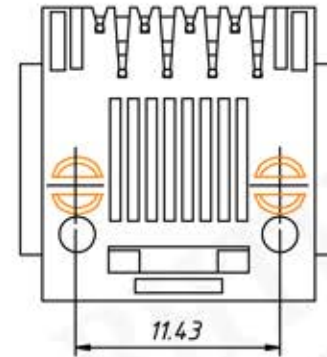

Material:
Housing: PBT+Glass Filled Polyester
Flammability Rating: UL94V-0
Contacts: Phosphor Bronze $\phi 0.46\text{mm}$
Plating: Gold Plating


Electrical:
Voltage Rating: 125VAC
Current Rating: 1.5A
Contact Resistance: 30m Ω Max.
Insulation Resistance: 500M Ω Min.
Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.
Durability: 600 cycles Min.
Operation Temperature: -40°C ~ +70°C

Order Information


RE - C - 156 - 8P8C - X - X - 1 - XX

Contacts: 8P8C
Panel Code: W-with Panel
 W/O-without Panel
Peg Code: L-L Peg S-Split Peg
Color Code: 1-Black
Plating Code:

01-Fu" Gold Plating
 02-3u" Gold Plating
 03-6u" Gold Plating
 04-15u" Gold Plating
 05-30u" Gold Plating



Without Panel

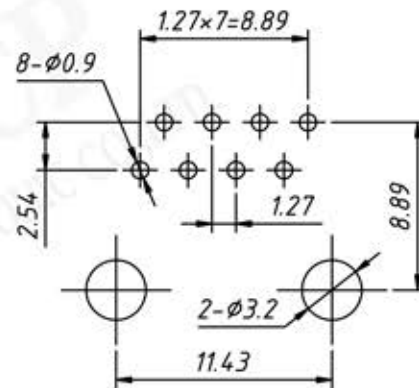

PCB Layout

