
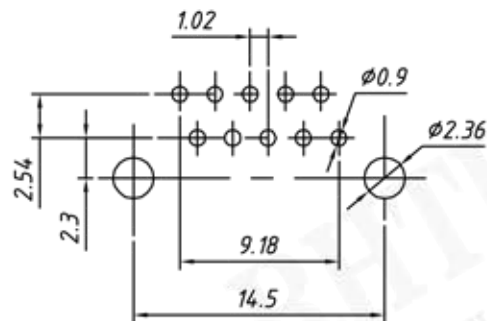


Without Panel

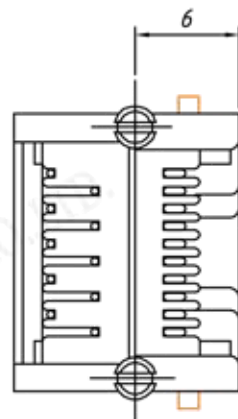

PCB Layout

Material:

Housing: PBT+Glass Filled Polyester

Flammability Rating: UL94V-0

Contacts: Phosphor Bronze $\phi 0.46\text{mm}$

Plating: Gold Plating

Electrical:

Voltage Rating: 125VAC

Current Rating: 1.5A


Contact Resistance: $30\text{m}\Omega$ Max.

Insulation Resistance: $500\text{M}\Omega$ Min.


Dielectric Strength: 1000VAC Rms 50Hz, 1 Min.

Durability: 600 cycles Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

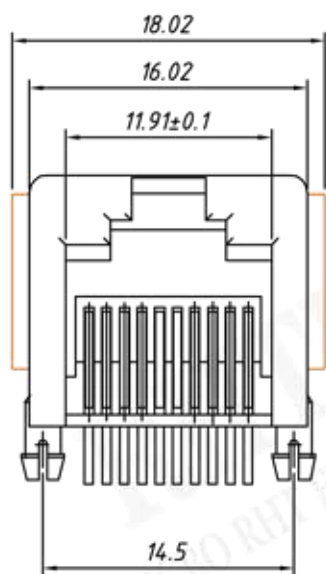

With Panel

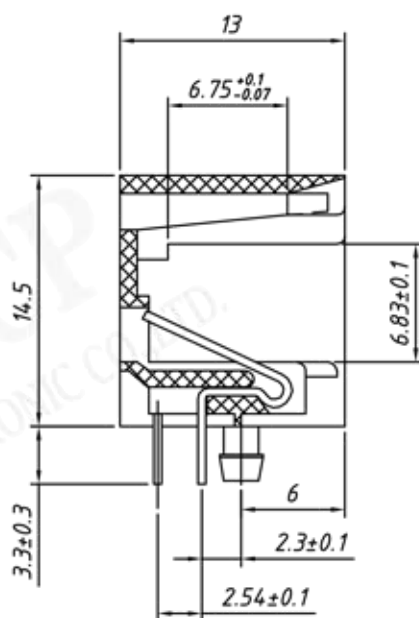

SECTION A-A

Order Information

RE-C-304-10P10C-W-1-XX

Contacts: 10P10C

Panel: W-With Panel

W/O-Without Panel

Color Code:

1-Black

2-Gray

Plating Code:

01-Fu" Gold Plating

02-3u" Gold Plating

03-6u" Gold Plating

04-15u" Gold Plating

05-30u" Gold Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE:A4

SCALE:---

>0~3

>3~18

>18~50

>50~120

±0.12

±0.15

±0.3

±0.5

RE-C-304-10P10C-X-X-XX

CONNECTORS