


Notes:
MATERIALS
HOUSING: HIGH TEMP. THERMOPLASTIC FLAMMABILITY UL 94V-0
CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT
 TIN PLANTING OVER NICKEL IN SOLDER AREA

PCB LAYOUT/TOP VIEW

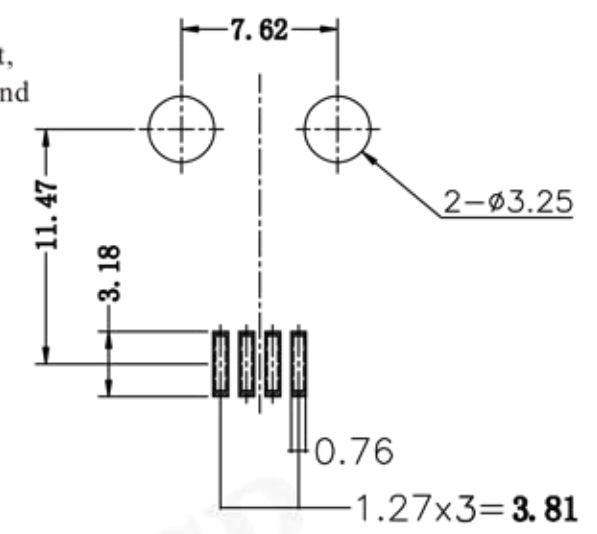

Electrical:
 1.Voltage Rating: 125 Vac Rms
 2.Current Rating: 1.5 Amp
 3.Contact Resistance: 40 Milliohms Max
 4.Insulation Resistance: 1000 Megohms Min@500 Vdc
 5.Dielectric Strength: 1000 Vac Rms 60Hz,1Min
Mechanical:
 1.Operating: 750 Cycles Min
Environmental:
 1.Storage: -40°C To +85°C
 2.Opertion: -20°C To +75°C **Gold Plating 6U"**
 Mates With Modular Plug Conforming To FCC Part 68,Subpart F

UNITS:mm	SHEET SIZE:A4	SCALE:---	
>0~3	>3~18	>18~50	>50~120
±0.12	±0.15	±0.3	±0.5