
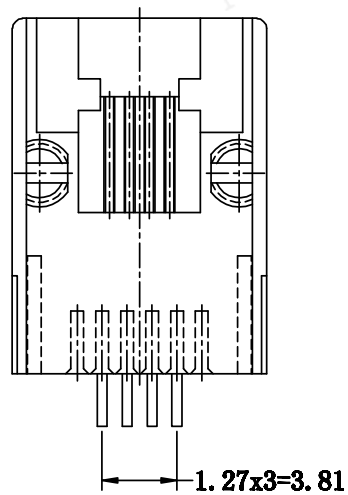


PCB LAYOUT/TOP VIEW

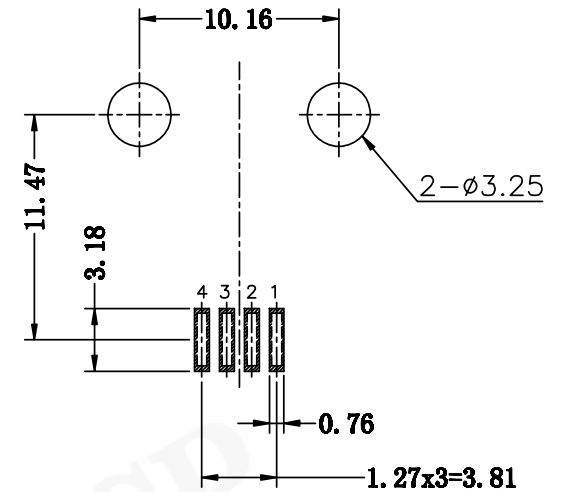

Notes :

MATERIALS Gold Plating:6U"

HOUSING: HIGH TEMP. THERMOPLASTIC FLAMMABILITY
UL 94V-0

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT
TIN PLATING OVER NICKEL IN SOLDER AREA

Electrical:

- 1.Voltage Rating: 125 Vac Rms
- 2.Current Rating: 1.5 Amp
- 3.Contact Resistance: 40 Milliohms Max
- 4.Insulation Resistance: 1000 Megohms Min@500 Vdc
- 5.Dielectric Strength: 1000 Vac Rms 60Hz,1Min

Mechanical:

- 1.Operating: 750 Cycles Min

Environmental:

- 1.Storage: -40 C°To +85 C°
- 2.Opertion: -20 C° To +75 C°

Mates With Modular Plug Conforming To FCC Part 68,Subpart F