
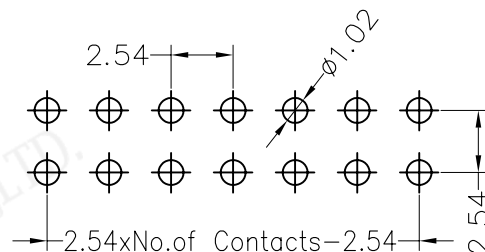




Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

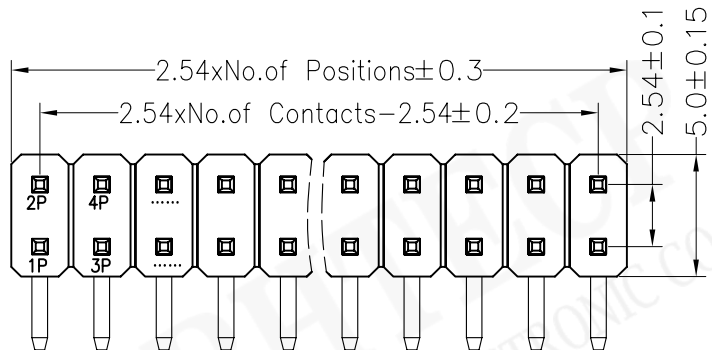

SPECIFICATIONS

Rated Current:3.0AMP  
Contact Resistance:20mΩ Max  
Withstand Voltage:1000V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PA6T  
Max.Processing Temp: 230°C for 30-60 seconds  
(260°C for 10 seconds)

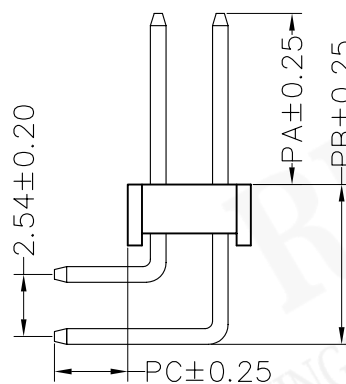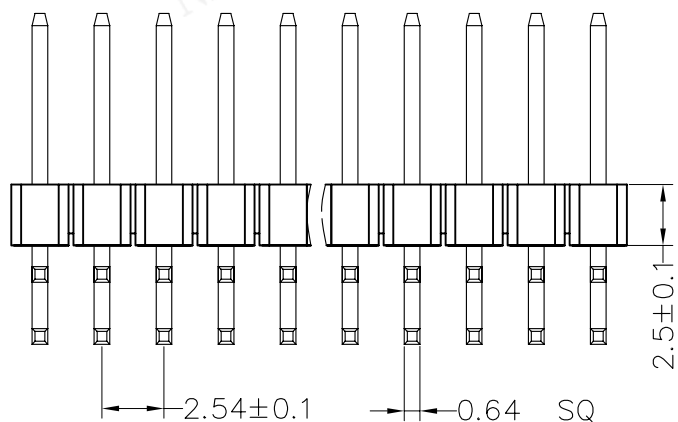

Dimension antitheses list

ITEM	PA	PC	PB	L短	L长
Standard	6.00	3.00	6.90	13.80	18.80
Alternate					

UNITS:mm

SHEET SIZE:A4

SCALE:---

RE-C-PH12XXCNG0R14.4-19.4001



NINGBO RHT ELECTRONIC CO.,LTD

>0~3

>3~18

>18~50

>50~120

±0.12

±0.15

±0.3

±0.5

CONNECTOR