


DIP Switch Series

RE-S-KLR End-stackable SMT Type DIP Switch

- Specifications**
- Contact Rating: 25 mA at 24VDC (switching)
100 mA at 50VDC (steady state)
 - Life: 1,000 cycles
 - Contact Resistance: 100mΩ Max.
 - Insulation Resistance: 100MΩ at 100VDC Min
 - Dielectric Strength: 300VAC Min
 - Storage Temperature: -40°C ~ 85°C
 - Operating Temperature: -25°C ~ 70°C.
 - Operation Force : 8N Max.

- Materials**
- Base & Cover: PPS (UL94V-0)
 - Actuator: PA46 (UL94V-0).
 - Contacts: Brass, Gold /Tin Plate
 - Terminals: Brass, Gold /Tin Plate
 - Mylar: 0.05mm UL94V-0 Mylar

ORDER INFORMATION

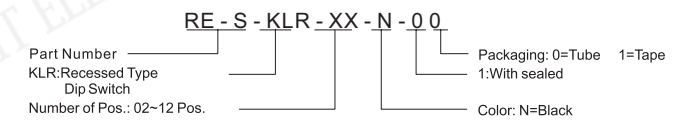

UNITS:mm	SHEET SIZE:A4	SCALE:---	
>0~3	>3~18	>18~50	>50~120
±0.12	±0.15	±0.3	±0.5

RE-S-KLR-XX-N-11
SWITCH