




PHOTO ONLY FOR REFERENCE

Specifications:

Connector Type A : U. FL
 Connector Type B : SMA
 Impedance : 50 Ω
 Frequency Range : DC to 3GHz
 Maximum Working Voltage : 60V rms
 Min. Dielectric Withstanding Voltage:200V rms
 Min. Insulation Resistance : 500MΩ
 Cable Assembly Type : RF Coaxial
 Cable Length : 200mm
 External Diameter : 1.37mm
 Cable Colour : Black

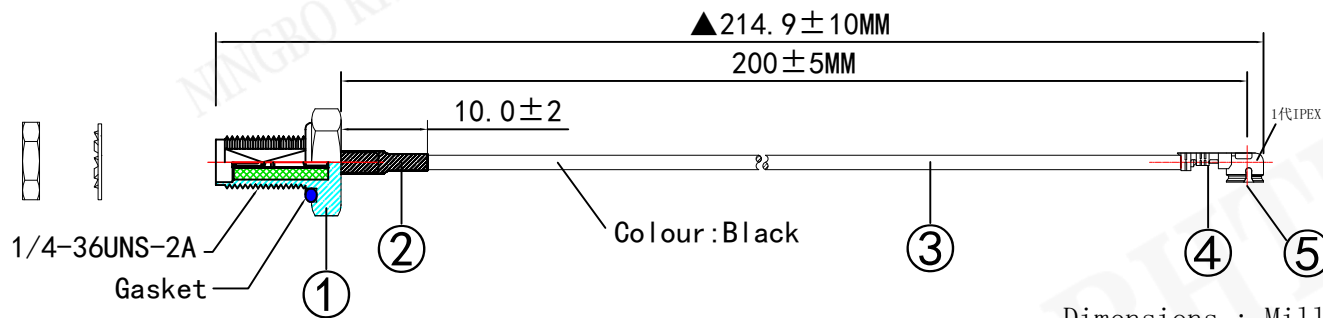

Dimensions : Millimetres

Item	Description
1	SMA B/H Jack Crimp Type for $\phi 1.37\text{mm}$ Cable (Nut1, Washer $\times 1$)
2	Heat Shrink Tube F32 $\phi 2.5\text{mm}$ L=10mm Colour:Black
3	$\phi 1.37\text{mm}$ Cable Colour:Black
4	U. FL-LP-088 Shell for $\phi 1.37\text{mm}$ Cable
5	U. FL-LP-088 Terminal for $\phi 1.37\text{mm}$ Cable



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE:A4

SCALE:---

RE-ANT-RFCA06A-OD1.13-L200

>0~3

>3~18

>18~50

>50~120

± 0.12

± 0.15

± 0.3

± 0.5

RF CABLE