
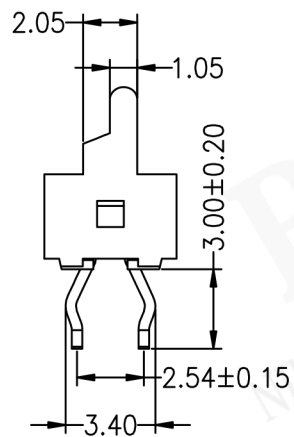
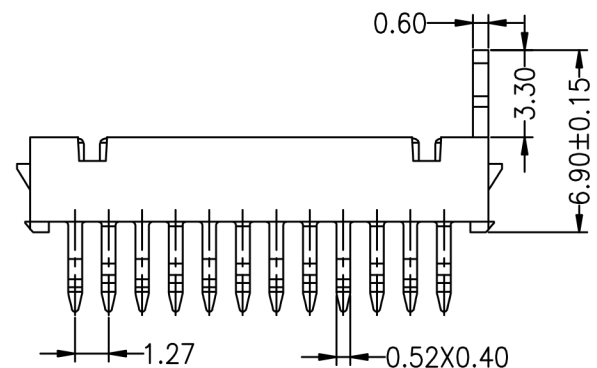


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

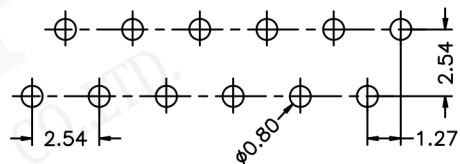

HSF RoHS

SPECIFICATIONS

- Rated Current:1.0AMP
- Contact Resistance:20mΩ Max at DC 100mA
- Withstand Voltage:500V AC/DC 50Hz For 1minute
- Insulation Resistance:1000MΩ Min
- Operation Temperature:-40°c to +105°c
- Contact Material:Brass
- Contact Plating:Au Over Ni
- Insulator Material:Polyester(UL94V-0)
- Standard: PA46/PBT



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:MM

SHEET SIZE:A4

SCALE:---

RE-C-IDC-XXMSSNANT01

>0~3

>3~18

>18~50

>50~120

±0.12

±0.15

±0.3

±0.5

CONNECTORS