

Material:

Housing: PBT UL 94V-0

Contacts: Brass

Plating: Au or Sn Over Ni

Cable: 1.27mm (0.050") pitch flat cable

Electrical Characteristics:

Current Rating: 3.0 AMP

Withstand Voltage: 1000V AC

Insulator Resistance: 1000M Ohm min

Contact Resistance: 20m Ohm max.

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Max. Processing Temp: 180°C for 30-60 seconds
 $(200^{\circ}\text{C}$ for 10 seconds)

Order Information:

RE-C-201Z-XX-G-E

IDC connectors



2.54mm Pitch

XX-No. of 06 ~ 64pin

Color: B-Black G-Gray

Type:

E-With ears N-Without ears

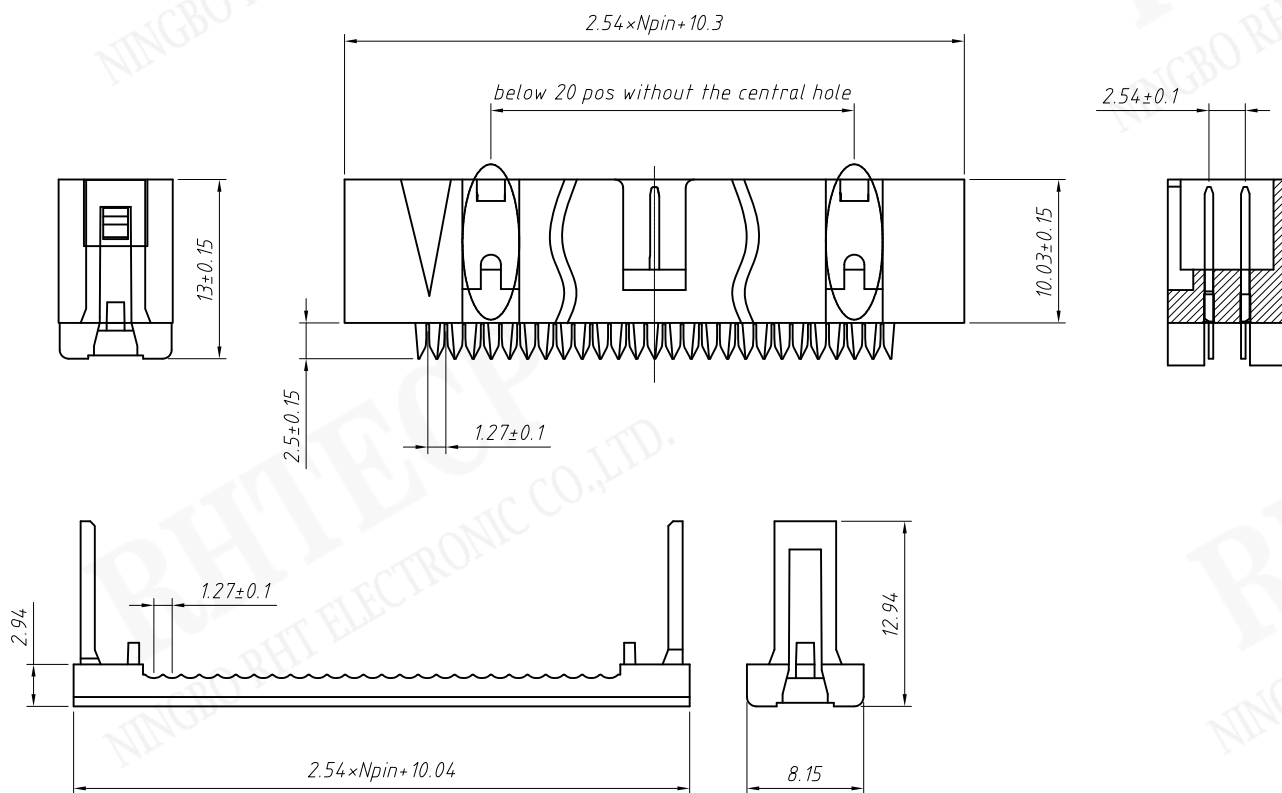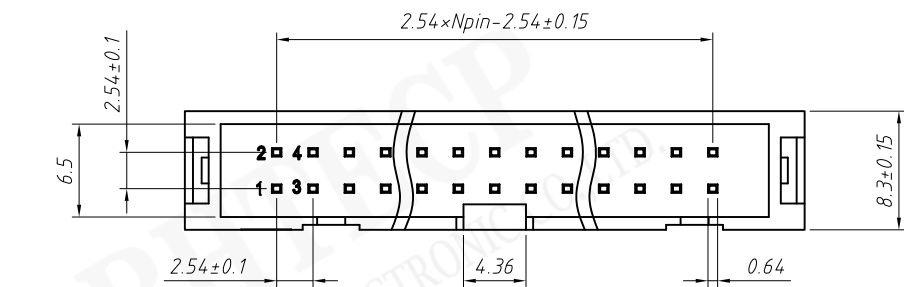

Material:

Housing: PBT, UL 94V-0

Contacts: Brass

Plating: Au or Sn Over Ni

Cable: 1.27mm (0.050") pitch flat cable

Electrical Characteristics:

Current Rating: 3.0 AMP

Withstand Voltage: 1000V AC

Insulator Resistance: 1000M Ohm min

Contact Resistance: 20m Ohm max.

Operating Temperature: -40°C ~ +105°C

Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Order Information:

RE-C-201Z-XX-G-N

IDC connectors

2.54mm Pitch

XX-No. of 06 ~ 64pin

Color: B-Black G-Gray

Type:

E-With ears N-Without ears