

Stereo Jack Series




RE-C-TG3.5-001A (Dip Mono Jack)




Technical parameters:

- Rated voltage: DC 30 V
- Rated current: 0.5 A
- Contact resistance: 0.03Ω, max
- Insulation resistance: 100MΩ, min
- Pressure: AC500V (50Hz) / 1minute
- Insertion Force :2-20 N
- Life: 50000 times
- Operating Temperature:-30°C ~ 70°C

Material:

- Housing Material:PBT
- Center Pin Material:
- Terminal 1 :Brass
- Terminal 2 :Copper Alloy
- Terminal 3 :Brass
- Bushing :Brass

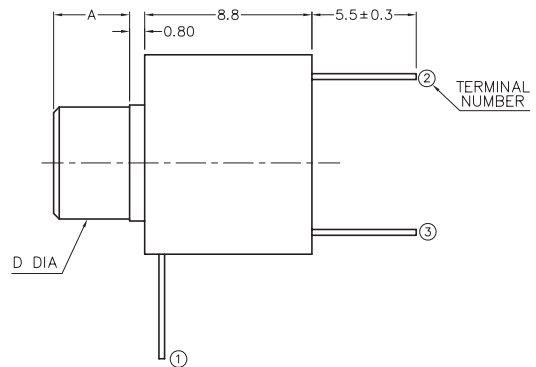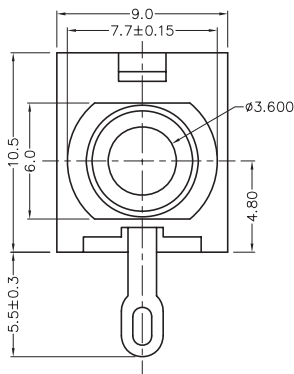

MODEL NO.	TG3.5-001A	TG3.5-001AA	TG3.5-001AB
D DIA	With NUT	With NUT	With NUT
	M6X0.5	M6X0.5	M6X0.5
A	4.0mm	4.5mm	3.0mm
SCHEMATIC			

ORDER INFORMATION

Product NO.: RE-C -TG3.5-001AA

